

RLC 200 RLC Meter

digimess® expert

Order No.: H.UC 30-00



The RLC 200, an automatic RLC meter, is designed for the manual or fully automatic measurement of components.

Full remote control is possible via an RS-232 interface.

All the usual component parameters such as resistance, conductance, inductance, capacitance, Q factor and loss factor can be determined with a basic accuracy of 0.2%. Deviations from the reference components can be represented either absolutely or relatively.

The information is displayed on a large, backlit alpha-numeric LCD.

In addition to parameter measurements, DC voltages up to 400 V can be measured with a resolution of 100 μ V.

The package includes extensive accessories including an adapter for radial and axial components, an adapter for SMD components and a 4-line measuring cable with Kelvin clips (see overleaf).

As you can see, the RLC 200 offers an unbeatable price/performance ratio.

Delivery package


Meter complete with mains cable, replacement fuses and operating instructions, 4-line RLC adapter for radial and axial components, 4-line SMD adapter, 4-line measuring cable with Kelvin clips,

2 voltage measuring cables with integrated test probes, 1 cable for external polarization voltage and 1 measuring earth cable.



4-line SMD adapter

4-line measuring cable with Kelvin clips

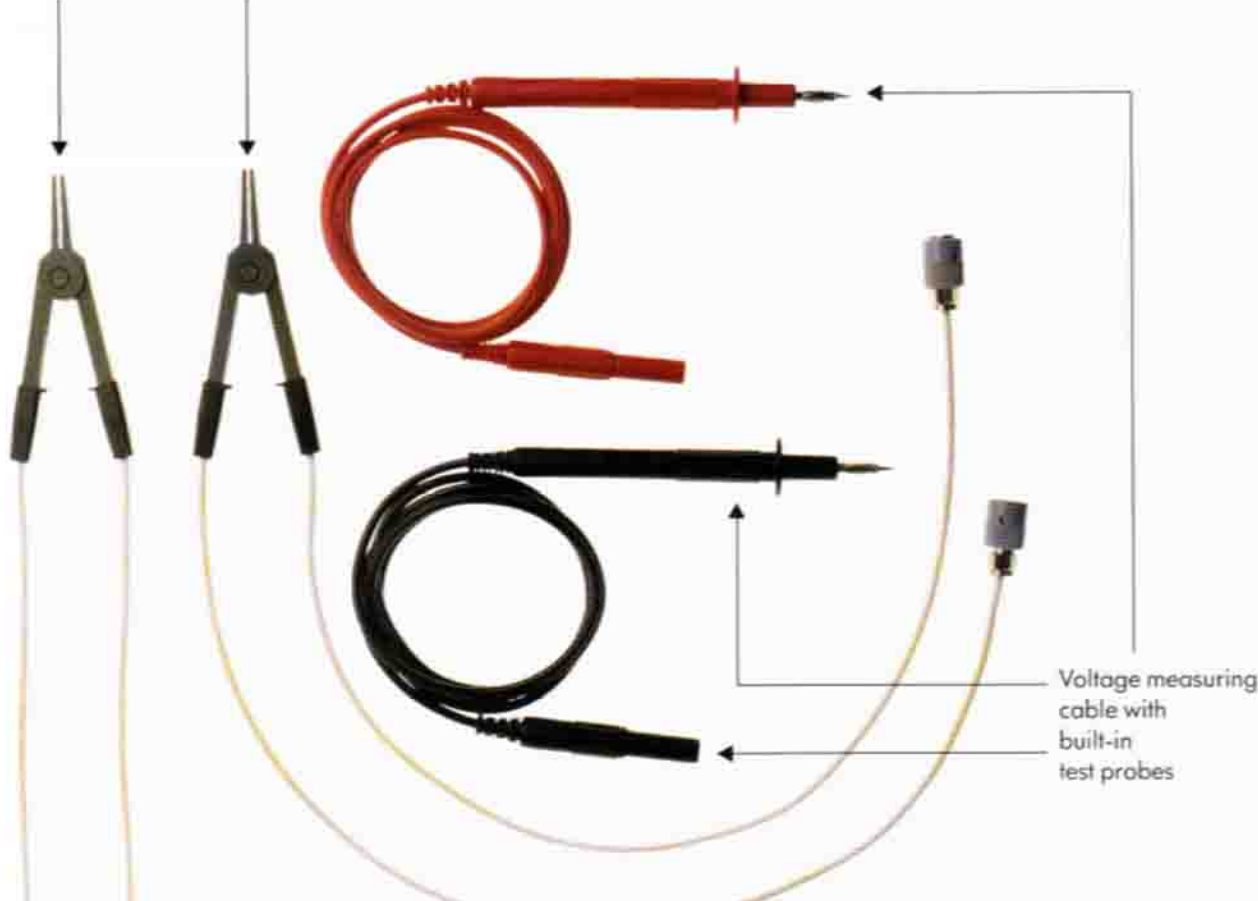

Voltage measuring cable with built-in test probes

Measuring parameters and measurement ranges

Measuring parameter	Measurement range		Resolution/dig
	from	to	
R	1 m Ω	100 M Ω	1 m Ω
G	1 nS	10 S	1 nS
C	0.1 pF	20 mF	0.1 pF
L	0.1 μ H	20 kH	0.1 μ H
D	0.001	2	0.001
Q	0.1	500	0.1
U _m	0.1 mV	400 V	0.1 mV
$\Delta\%$	-999%	+999%	0.1%

Measurement specifications

Measuring parameters	R, G, C, L, D, Q, U _m , $\Delta/\Delta\%$
Type of connection	Series or parallel connection with 4-pin arrangement of measuring terminals
Measuring frequencies	100 Hz, 1 kHz
Measuring voltage	50 mV, 1 V
Polarization of test object	+5 V
External voltage source	$\leq +30$ V
Selection of measurement range	Automatic or as fixed range
Input resistance of DC voltmeter	> 9 M Ω
Triggering	internal, manual, external via RS 232 C
Measuring time	200 ms
Display	3 1/2-digit (measured value and unit)
Interface	RS 232 C
Remote control functions:	R, G, C, L, D, Q, U _m , automatic measuring parameter selection, measurement types, measuring frequencies, measuring voltages, automatic measurement range selection or fixed range, absolute and percentage deviation ($\Delta/\Delta\%$) with input of reference value, triggering and acoustic short-circuit indicator
Data output	Measuring parameter, measurement type, measured value

Measurement tolerances

The following measurement tolerances apply for a reference temperature of +23 °C \pm 1 °C. In the case of deviations from the reference temperature, the tolerance increases by 50% for every 10 °C.

Measurement tolerances for R and G (Q < 1, D > 1) and for L and C (Q > 1, D < 1)

The measurement tolerance T_{meas} is calculated using the following equation:

$$T_{meas} = \left[\pm \left(A\sqrt{1 + P_n^2} \right) \pm K \right] K_t$$

- A = basic accuracy in %
- P_n = parameter Q (for R-G-measurement) or parameter D (for L-C-measurement)
- K = additional error in the last digit (dig)
- K_t = temperature coefficient error

The following equations can be used to calculate impedance Z from R, G, C and L:

$$|Z| = R = 1/G \quad |Z| = 2 \pi fL \quad \text{and} \quad |Z| = \frac{1}{2 \pi fC}$$

Basic accuracy A + additional error K where U_{meas} = 1 V

Impedance Z	Measuring frequency	
	100 Hz	1 kHz
100 m Ω $\leq Z <$ 2 Ω	$\pm 0.5\% \pm 2$ dig	$\pm 0.5\% \pm 2$ dig
2 Ω $\leq Z <$ 20 Ω	$\pm 0.3\% \pm 2$ dig	$\pm 0.3\% \pm 1$ dig
20 Ω $\leq Z <$ 200 Ω	$\pm 0.2\% \pm 2$ dig	$\pm 0.2\% \pm 1$ dig
200 Ω $\leq Z <$ 2 k Ω	$\pm 0.2\% \pm 2$ dig	$\pm 0.2\% \pm 1$ dig
2 k Ω $\leq Z <$ 20 k Ω	$\pm 0.2\% \pm 2$ dig	$\pm 0.2\% \pm 1$ dig
20 k Ω $\leq Z <$ 500 k Ω	$\pm 0.2\% \pm 2$ dig	$\pm 0.2\% \pm 1$ dig
500 k Ω $\leq Z <$ 5 M Ω	$\pm 0.3\% \pm 3$ dig	$\pm 0.3\% \pm 2$ dig
5 M Ω $\leq Z <$ 20 M Ω	$\pm 1\% \pm 5$ dig	$\pm 1.0\% \pm 2$ dig

Where impedance $|Z| \geq 20$ M Ω (0 < G \leq 50 nS), U_{meas} = 1 V. The measurement tolerance is specified using the conductance deviation G = ± 2 nS for both measuring frequencies.

Where impedance $|Z| < 100$ m Ω (0 < R < 100 m Ω), U_{meas} = 50 mV. The measurement tolerance is specified using the resistance deviation R = ± 2 m Ω for both measuring frequencies.

All percentages refer to the displayed measured values.

Basic accuracy A + additional error K where U_{meas} = 50 mV

Impedance Z	Measuring frequency	
	100 Hz	1 kHz
100 m Ω $\leq Z <$ 2 Ω	not specified	$\pm 0.8\% \pm 3$ dig
2 Ω $\leq Z <$ 20 Ω	$\pm 0.5\% \pm 3$ dig	$\pm 0.5\% \pm 2$ dig
20 Ω $\leq Z <$ 200 Ω	$\pm 0.3\% \pm 3$ dig	$\pm 0.3\% \pm 2$ dig
200 Ω $\leq Z <$ 2 k Ω	$\pm 0.3\% \pm 3$ dig	$\pm 0.3\% \pm 2$ dig
2 k Ω $\leq Z <$ 20 k Ω	$\pm 0.3\% \pm 3$ dig	$\pm 0.3\% \pm 2$ dig
20 k Ω $\leq Z <$ 500 k Ω	$\pm 0.3\% \pm 3$ dig	$\pm 0.3\% \pm 2$ dig
500 k Ω $\leq Z <$ 5 M Ω	$\pm 0.5\% \pm 5$ dig	$\pm 0.5\% \pm 3$ dig
5 M Ω $\leq Z <$ 20 M Ω	not specified	$\pm 3.0\% \pm 3$ dig

Where impedance $|Z| \geq 20$ M Ω (0 < G \leq 50 nS), U_{meas} = 50 mV. The measurement tolerance is specified using the conductance deviation G = ± 3 nS for the measuring frequency 1 kHz.

Where impedance $|Z| < 100$ m Ω (0 < R < 100 m Ω), U_{meas} = 50 mV. The measurement tolerance is specified using the resistance deviation R = ± 3 m Ω for the measuring frequency 1 kHz.

All percentages refer to the displayed measured values.

Measurement tolerance of loss factor D

The measuring tolerance T_{meas} of loss factor of capacitances D can be calculated using the equation:

$$T_{meas} = 0.1 D_m \pm D$$

- D_m = measured value D (display ed D-value)
- D = additional error

Additional error D where f_{meas} = 1 kHz

Capacitance C	Measuring voltage	
	50 V	1 V
10 pF $\leq C <$ 100 pF	not specified	± 0.005
100 pF $\leq C <$ 10 nF	± 0.005	± 0.005
10 nF $\leq C <$ 100 μ F	± 0.004	± 0.003
100 μ F $\leq C <$ 1 mF	± 0.010	± 0.005

Additional error D where f_{meas} = 100 Hz

Capacitance C	Measuring voltage	
	50 V	1 V
10 pF $\leq C <$ 1 nF	not specified	± 0.005
1 nF $\leq C <$ 10 nF	± 0.005	± 0.005
10 nF $\leq C <$ 100 μ F	± 0.003	± 0.003
100 μ F $\leq C <$ 1 mF	± 0.005	± 0.003
1 mF $\leq C <$ 10 mF	not specified	± 0.010

Measurement tolerance of Q factor

The tolerance is ± 0.2 in the impedance range 100 m Ω $\leq |Z| <$ 20 M Ω for R or G as test object.

The measurement tolerance of the Q factor of inductances is calculated using the following equation: $T_{meas} = 0.1 Q_m \pm Q$

Q_m = measured value Q Q = additional error (display ed Q-value)

Additional error Q where f_{meas} = 1 kHz

Inductance L	Measuring voltage	
	50 mV	1 V
100 μ H $\leq L <$ 1 mH	± 0.5	± 0.4
1 mH $\leq L <$ 100 H	± 0.3	± 0.3
100 H $\leq L <$ 1 kH	± 1.5	± 0.5
1 kH $\leq L <$ 2 kH	not specified	± 0.5

Additional error Q where f_{meas} = 100 Hz

Inductance L	Measuring voltage	
	50 mV	1 V
1 mH $\leq L <$ 10 mH	not specified	± 0.3
10 mH $\leq L <$ 2 H	± 0.7	± 0.3

Measurement tolerance with DC voltage

In all measurement ranges, the measurement tolerance with DC voltage is: $T_{meas} = 0.2\% \pm 1$ dig.

The percentages refer to the displayed value. With a short-circuited input, the display may fluctuate by a maximum of ± 0.2 mV.

The specified values apply for a reference temperature of 23 °C \pm 1 °C. In the case of deviations from the reference temperature, the tolerance increases by 50% for every 10 °C.

Environmental conditions

Nominal temperature	+23 °C \pm 1 °C
Operating temperature	+0 °C ... +50 °C
Relative atmospheric humidity	40 ... 80%
Atmospheric pressure	86 ... 106 kPa
Interference suppression	VfG 243/1991

Power supply	Sinusoidal AC voltage 110/220 V ($\pm 10\%$) (internally switchable) 50 ... 60 Hz ($\pm 5\%$)
Operating voltage	16 VA
Power consumption	16 VA
Fuses	T 80 mA/250 V (220 V~), T 160 mA/250 V (110 V~)
Protection class	I, in accordance with IEC 348, corresponds DIN VDE 0411 Part 1 E8 1
Dimensions (W x H x D)	291 mm x 108 mm x 259 mm
Dimensions of packing	338 mm x 138 mm x 408 mm
Weight	approx. 2.8 kg
Weight incl. packing and accessories	4.5 kg